


Quick Start Guide

AV-BSBL

Thank you for purchasing this product. This guide will provide you with a brief summary of the steps involved in deploying the Folding Steady Burning Barrette with tie-down installation.

Your system will consist of: 1 x Folding Steady Burning Barrette, 2 x Stanchions (or Support Pole), 2 x 2 in. Stainless Couplings, 2 x Mounting Caps, 8 x Ground Stakes, 4 x 12 ft. Line (Single Loop), 4 x 14 in. Line (Double Loop), 4 x Cam Clips

Required Tools: Mallet (User Supplied)

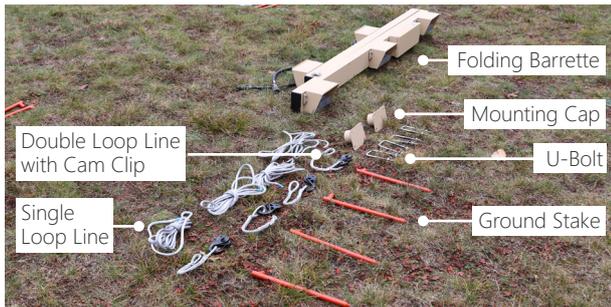


Step 1: Gather All Components

Lay all the parts on the ground in preparation for assembly.

Step 2: Open Barrette Latch

- Lift the handle of the butterfly latch to unlock.
- Unfold the Barrette.

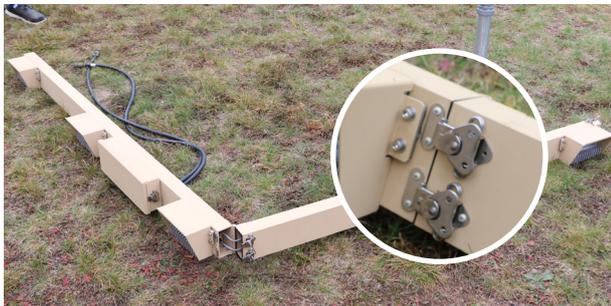

Step 3: Straighten the Barrette

- Straighten the barrette until it is fully extended.
- Secure the two latches.

Step 4: Install Mounting Cap

- Slide two U-bolts onto barrette between the first and second light head.
- Flip barrette over.
- With flat side down, align the mounting cap holes with the U-bolt. Ensure the arrow on mounting cap is pointing towards the lights.
- Place (4) flat washers over U-bolts and thread (4) hex nuts until fingertight.
- Thread coupling onto mounting cap.
- Repeat on other end.



For the full manual, visit the link below:

avlite.com/product/barrette-steady-burning-light-av-bsbl/



Step 5: Assemble Stanchions

- Thread frangible coupling into the threaded flange.
- Thread support leg into the other end of frangible coupling.
- Repeat steps for second stanchion.

Step 6: Insert Stanchion on Barrette

- Flip stanchion upside down.
- Insert the stanchion into the mounting cap.
- Tighten the coupling in an upward motion until secured to the mounting cap.
- Repeat on other side.



Step 7: Set Up Barrette

- Flip entire Barrette assembly over so it is supported by the stanchions.
- Place Barrette in desired location.
- Place a stake outside the threaded flange of the stanchion.
- Use a mallet to pound the stake at an angle into the ground to keep the Barrette upright.
- Repeat on opposite side of the stanchion.
- Repeat steps to stake other stanchion.

Step 8: Set Up Tie-Down Stakes

- Insert tie-down stake into the ground approximately 6-7 feet from one of the stanchions on the front side of the Barrette.
- Use a mallet to pound a stake securely into the ground.
- Repeat steps from the back side of the Barrette.
- Repeat steps on the opposite side.



Head Office
+61 (0)3 5977 6128

Avlite USA
+1 (603) 737 1311

Avlite Asia
+65 9119 8770



General Enquiries
info@avlite.com





Step 9: Set Up Tie-Down At Stake

- a. Thread one end of the double loop line through the loop of the other end.
- b. Place around top of the tie-down stake.
- c. Pull the line until the loop is taut around stake.
- d. Clip the carabiner of the cam clip to the other end of the loop.



Step 11: Feed the Line into Cam Clip

- a. Pull the line from the stanchion to the ground stake located directly in front of the stanchion.
- b. Take the cam clip from the ground stake tie-down assembly, and feed the tail end of the line into the cam locking mechanism of the clip.
- c. Pull the line through the cam clip to eliminate any slack.



Step 10: Set Up Tie-Down at Stanchion

- a. Wrap 12 ft. single loop line around the top of a stanchion.
- b. Thread the tail end through the loop.
- c. Pull the line until the loop is taut around stanchion.



Step 12: Complete Tie-Down Procedure

Repeat steps 9-12 until the Folding Steady Burning Barrette is fully supported on 4 sides.



For the full manual, visit the link below:

avlite.com/product/barrette-steady-burning-light-av-bsbl/



Step 13: Connect to Battery Box

- a. Connect Barrette PCU power cables to the Battery Box.
- b. Refer to MALSR Cable Layout diagram in the Approach Lighting Installation & Service Manual for direction on which barrettes connect to the Battery Box and which barrettes connect to the next barrette in line.

Step 14: Connect AC Long Lines and Optional Solar

- a. Connect the AC long lines to the AC Input on the Battery Box.

Note: Please proceed to Step b for optional solar panel installation instructions.

- b. Connect the Solar Panel cables to the Solar Panel inputs on the Battery Box.



Head Office
+61 (0)3 5977 6128

Avlite USA
+1 (603) 737 1311

Avlite Asia
+65 9119 8770



General Enquiries
info@avlite.com

